




# GIFS

## Support Type Current Transformer Outdoor Standard Type

GIFS 12 | 17,5 | 24 | 36

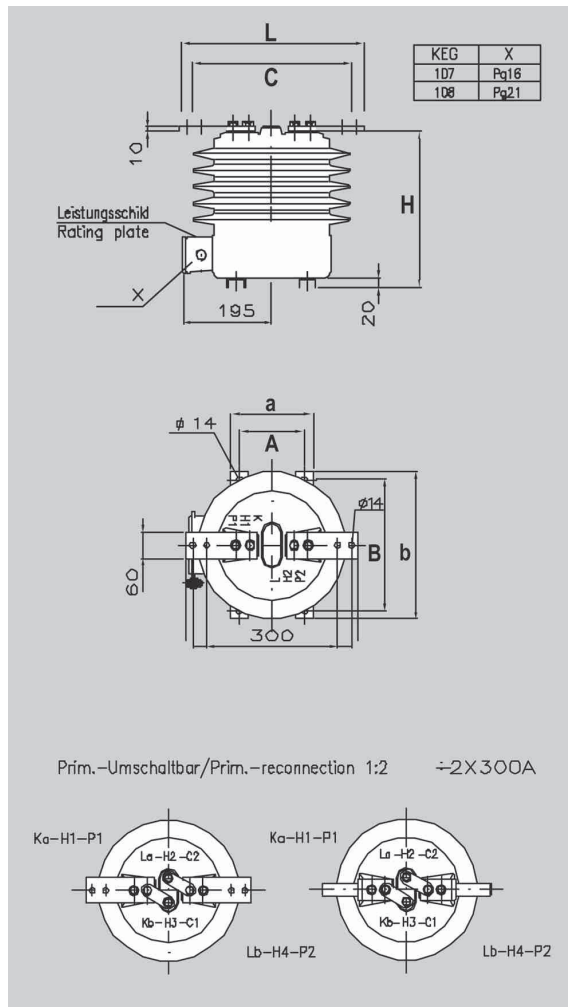

TYPE GIFS Dimensions mm		
	GIFS 12   17,5   24	GIFS 36
A	150	150
B	300	300
a	190	190
b	335	335
C	335	335
H	355	439

TYPE GIFS					
		GIFS 12	GIFS 17,5	GIFS 24	GIFS 36
$U_m$	kV	12	17,5	24	36
Test voltages	kV	28 75	38 95	50 125	70 170
Rated Primary Current – $I_{PN}$	A	up to 1250			
Rated Secondary Current – $I_{SN}$	A	1   5	1   5	1   5	1   5
Rated Short Time Thermal Current – $I_{th}$		up to 1000 x $I_{PN}$   max. 63 kA			
Rated peak Current – $I_{dyn}$		2,5 x $I_{th}$ , max. 100 kA			
Core(s), Number of Cores		Must be determined on the basis of the requirements accuracy class, over-current value, burden			
Frequency	Hz	50 60			
Creepage Distance	mm	575	575	575	926
Weight	kg	40	40	40	55

Subject to Technical Changes



GERMANY HAMBURG • WIRGES • KIRCHAICH • DRESDEN  
AUSTRIA MARCHTRENK | HUNGARY KECSKEMÉT | CHINA SHANGHAI | USA LAVONIA

